

3 1/2 DIGITAL PANEL METER- 1/32 DIN

CSMS-321

FEATURE

- Measuring DCA, DCV, ACA, ACV, Temperature
- Accuracy: DC : $\pm 0.1\%$; AC : $\pm 0.25\%$;
Pt100 : $\pm 0.2\%$; Type K, J : $\pm 1\%$
- 3 1/2 Digital display: 1999
- Easy-to-wire, screw type terminal
- Outside dimensions is 1/32 DIN standard (48x24mm)
- High stability & low cost

Miniature panel meter




MEASUREMENT


Measuring Range	Resolution	Input Impedance	Variable to be measured
Current	199.9 μ A	0.1 μ A	≤ 1 K ohm
	1.999 mA	0.001 mA	≤ 100 ohm
	19.99 mA	0.01 mA	≤ 10 ohm
	199.9 mA	0.1 mA	≤ 1 ohm
	1.999 A	0.001 A	≤ 0.05 ohm
Voltage	199.9 mV	0.1 mV	≥ 5 M ohm
	1.999 V	0.001 V	≥ 1 M ohm
	19.99 V	0.01 V	≥ 1 M ohm
	199.9 V	0.1 V	≥ 1 M ohm
	250 V	1 V	≥ 1 M ohm
Temp.	T/C: Type K	0~1200°C	≥ 1 M ohm
	T/C: Type J	0~750°C	≥ 1 M ohm
	RTD: Pt100	-40.0~199.9°C	≥ 1 M ohm
	RTD: Pt100	0~600°C	≥ 1 M ohm

- ___ **Measuring accuracy:** DC: $\pm 0.1\%$ F.S. ± 1 digit
AC: $\pm 0.25\%$ F.S. ± 1 digit
T/C: $\pm 1\%$ F.S. ± 1 digit
Pt100: $\pm 0.2\%$ F.S. ± 1 digit
- ___ **Measuring range:** Selectable soldering pads on pcb of rear side
- ___ **Decimal point:** Selectable soldering pads on pcb of rear side
- ___ **Span adjustment:** Rough adjustment 10~100% of F.S..
Fine adjustment $\leq 10\%$ of F.S.
- ___ **Zero adjustment:** $\leq 5\%$ of F.S.
- ___ **Sampling time:** About 3 cycles/sec.
- ___ **Polarity indication:** When input is negative " - "
- ___ **Over-range indication:** " 1 " display
- ___ **Max. input over capability:** Voltage: 1.2 x rated continuous
1.5 x rated for 10 seconds
Current: 1.2 x rated continuous
- ___ **Operating temperature:** 0~60 °C
- ___ **Operating relative humidity:** 20~95 %RH
- ___ **Temperature coefficient:** ≤ 100 PPM/°C (0~50°C)
 ≤ 50 PPM/°C (23 \pm 3°C)
- ___ **Storage temperature:** -10~70 °C
- ___ **Power Supply:** DC 5V, 12V, 24V $\pm 10\%$ (Isolated)
- ___ **Power consumption:** 700 mW
- ___ **Dielectric Strength:** AC 500V for 1 min (Between Power / Input)
AC 2.0KV for 1 min (Between Terminal / Case)
- ___ **Weight:** 350g


ADJUSTMENT

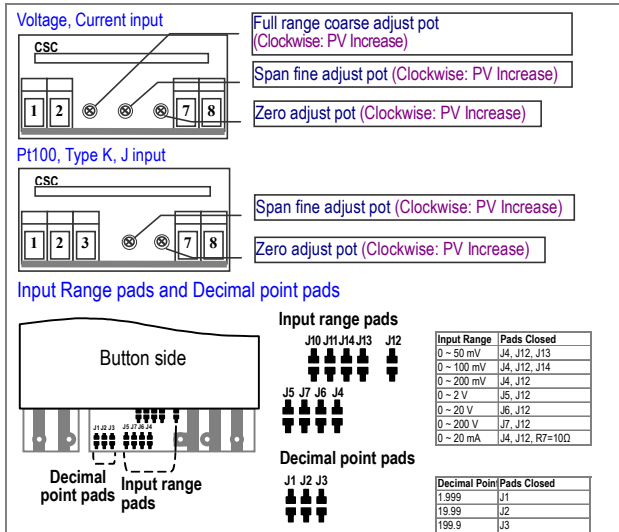

DIMENSIONS

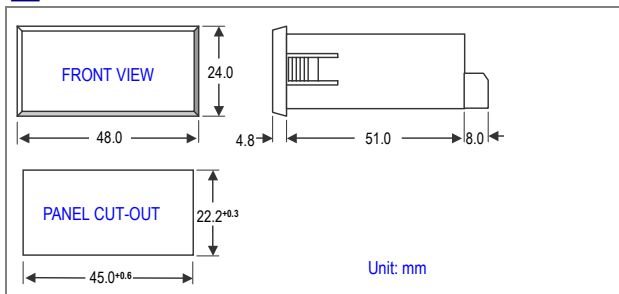

CONNECTION DIAGRAM

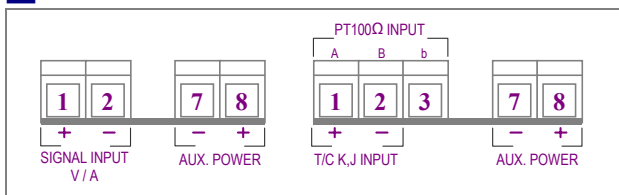

ORDER INFORMATION

CSMS-321

Input Type — Input Range — Aux. Power

CODE	INPUT TYPE	CODE	INPUT RANGE	CODE	INPUT RANGE	CODE	INPUT RANGE	CODE	AUX. POWER
D	DC	A	199.9 μ A	1	0 ~ 50 mV	K	K 0~1200°C	D5	DC 5 V
A	AC	B	1.999 mA	2	199.9 mV	J	J 0 ~ 750°C	D12	DC 12 V
T	Temperature	C	19.99 mA	3	1.999 V	P1	Pt100 -40.0~199.9°C	D24	DC 24 V
		D	199.9 mA	4	19.99 V	P2	Pt100 0~600°C	DO	Specify
		E	1.999 A	5	199.9 V	O	Specify		
		F	4 ~ 20 mA	6	250 V				
		G	0 ~ 1 mA	7	1 ~ 5 V				
		H	0 ~ 10 mA	8	0 ~ 10 V				
		I	0 ~ 20 mA	9	0 ~ 5 V				
		AO	Specify	VO	Specify				